



**FONDI TIPO UV 1**

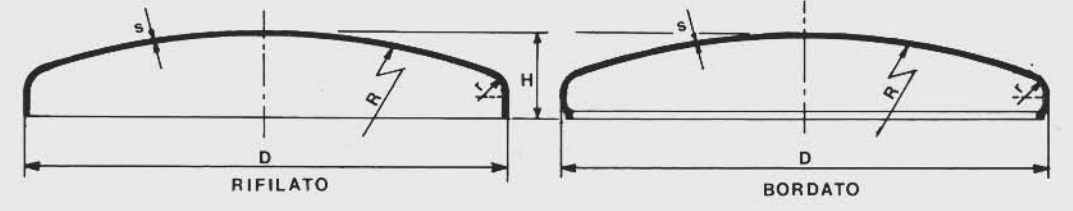


D	H	R	r	s	D	H	R	r	s
159	60	160	16	2 ÷ 3	840	145	1250	35	2 ÷ 3
200	60	200	20	2 ÷ 3	850	140	1270	35	2 ÷ 3
220	60	220	22	2 ÷ 3	900	145	1390	47	2 ÷ 3
230	65	230	23	2 ÷ 3	950	150	1430	45	2 ÷ 3
240	65	240	24	2 ÷ 3	1000	160	1385	42	2 ÷ 3
250	70	250	25	2 ÷ 3	1050	170	1450	40	2 ÷ 3
270	70	270	27	2 ÷ 3	1100	175	1500	50	2 ÷ 3
280	70	280	28	2 ÷ 3	1150	160	1650	45	2 ÷ 3
300	80	300	30	2 ÷ 3	1200	155	1880	46	2 ÷ 3
315	80	315	32	2 ÷ 3	1250	170	2350	50	2 ÷ 3
320	80	320	32	2 ÷ 3	1300	150	2750	55	2 ÷ 3
350	85	350	35	2 ÷ 3	1350	145	2855	48	2 ÷ 3
360	85	360	36	2 ÷ 3	1400	150	2800	45	2 ÷ 3
390	90	390	39	2 ÷ 3	1450	130	2850	40	2 ÷ 3
400	100	400	40	2 ÷ 3	1500	160	3400	46	2 ÷ 3
430	100	430	43	2 ÷ 3	1550	170	3050	50	2 ÷ 3
450	105	450	45	2 ÷ 3	1600	165	3320	45	2 ÷ 3
500	105	610	42	2 ÷ 3					
550	110	680	43	2 ÷ 3					
600	115	980	30	2 ÷ 3					
640	115	950	35	2 ÷ 3					
650	115	835	37	2 ÷ 3					
680	120	850	35	2 ÷ 3					
690	120	850	35	2 ÷ 3					
700	130	880	35	2 ÷ 3					
740	135	1100	40	2 ÷ 3					
750	140	1140	45	2 ÷ 3					
800	145	1125	37	2 ÷ 3					
810	145	1200	35	2 ÷ 3					

**FONDI TIPO UV 2** ( $R = D / r = \frac{1}{10} \cdot D$ )

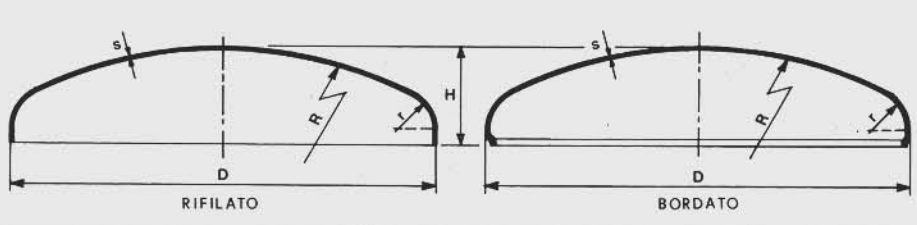


D	H	R	r	s
200	60	200	20	2 ÷ 3
250	70	250	25	2 ÷ 3
300	80	300	30	2 ÷ 3
350	85	350	35	3 ÷ 4
400	110	400	40	3 ÷ 4
450	118	450	45	3 ÷ 5
500	135	500	50	3 ÷ 5
550	145	550	55	3 ÷ 5
600	150	600	60	3 ÷ 5
650	160	650	65	3 ÷ 5
700	170	700	70	3 ÷ 5
750	180	750	75	4 ÷ 5
800	190	800	80	4 ÷ 5
850	200	850	85	4 ÷ 5
900	205	900	90	4 ÷ 5
950	225	950	95	4 ÷ 5
1000	245	1000	100	4 ÷ 6
1050	250	1050	105	4 ÷ 6
1100	260	1100	110	4 ÷ 6
1150	275	1150	115	4 ÷ 6
1200	290	1200	120	4 ÷ 6
1250	300	1250	125	4 ÷ 6
1300	310	1300	130	4 ÷ 6
1350	320	1350	135	4 ÷ 6
1400	340	1400	140	4 ÷ 6
1450	345	1450	145	4 ÷ 6
1500	360	1500	150	4 ÷ 6

**FONDI TIPO UV 3** ( $R = 0,8 \cdot D / r = \frac{1}{6,5} \cdot D$ )

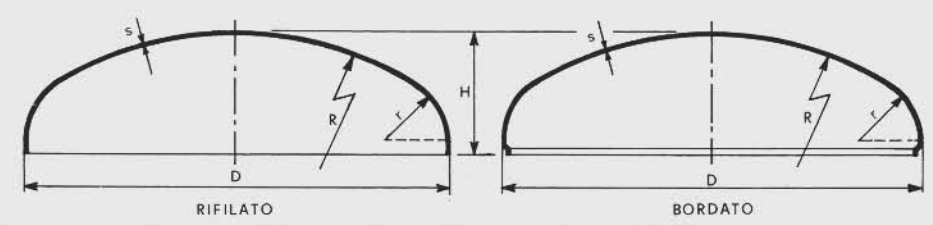


D	H	R	r	s
200	75	160	30,7	3
250	90	200	38,4	3
300	105	240	46	3 ÷ 4
350	120	280	54	3 ÷ 4
400	140	320	62	3 ÷ 4
450	150	360	70	3 ÷ 5
500	165	400	77	3 ÷ 5
550	175	440	85	3 ÷ 5
600	190	480	92	3 ÷ 5
650	200	520	100	3 ÷ 5
700	210	560	110	4 ÷ 5
750	230	600	116	4 ÷ 5
800	240	640	125	4 ÷ 5
850	250	680	130	4 ÷ 5
900	270	720	140	4 ÷ 5
950	280	760	150	4 ÷ 5
1000	300	800	155	4 ÷ 5
1050	300	840	165	5 ÷ 6
1100	320	880	170	5 ÷ 6
1150	320	920	177	5 ÷ 6
1200	340	960	185	5 ÷ 6
1250	340	1000	195	5 ÷ 6
1300	350	1040	200	5 ÷ 6

**CALOTTINE**

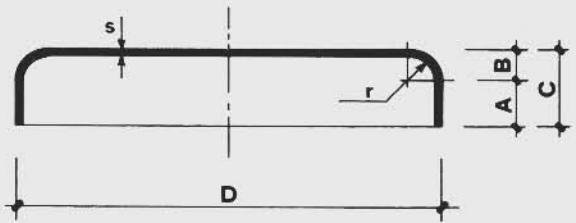


**CONTROFONDI PER BETONIERE**

(d = diametro foratura a richiesta)  
(spessori: 2,5 ÷ 3,5 mm)

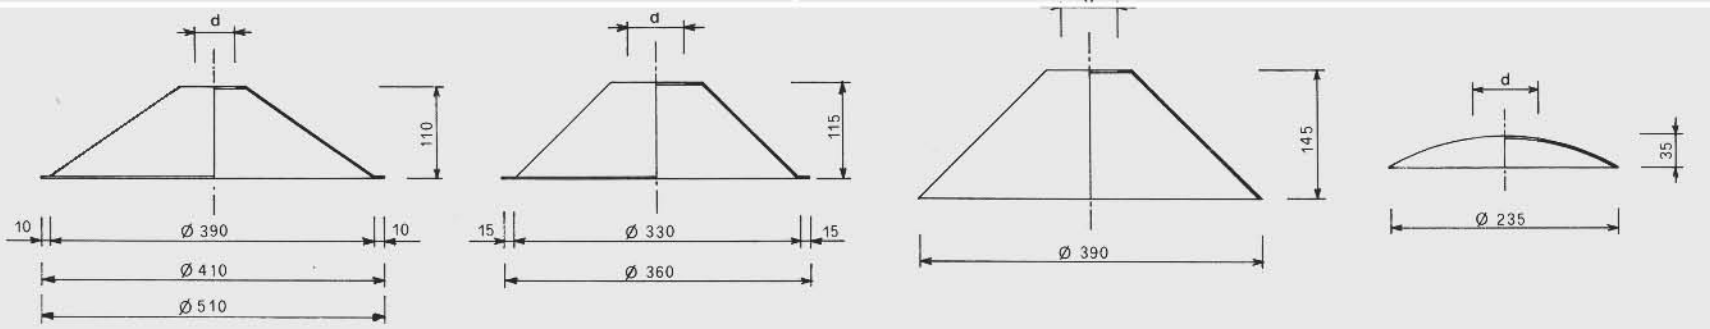


**FONDO A CAPPELLO CINESE**

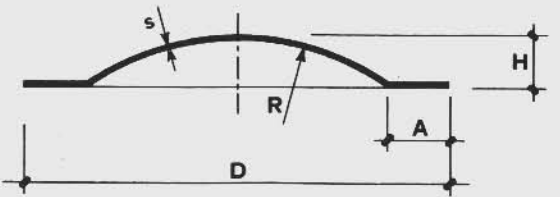

- Ø EST. 290 - Ø INT. 230
- Ø EST. 330 - Ø INT. 270
- Ø EST. 460 - Ø INT. 390
- Ø EST. 510 - Ø INT. 440

**CONI BICCHIERE PER BETONIERE**

SENZA SALDATURA CON BORDINO SUPERIORE E BORDATURA INFERIORE

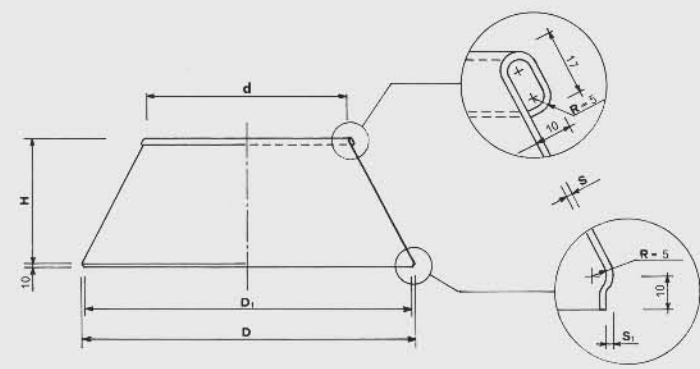

D	d	D1	H	S	S1
600	350	596	220	1,2	2
640	350	636	265	1,2	2
680	400	676	280	1,5	2
705	400	701	380	1,5	2
742	400	738	315	1,5	2
800	450	796	345	1,5	2
810	450	806	345	1,5	2
840	450	836	350	1,5	2
850	450	846	365	1,5	2
900	450	896	330	1,5	2
950	450	946	365	1,5	2

**TIPO DI BORDATURA ESEGUIBILE**

